

Key Functions

- Video Analytics: Intelligent Motion Detection, Intrusion and Tamper Detection
- Quad Stream (H.264/H.265, MJPEG) for simultaneous access to lo and hi res
- Onvif Profile S for compatibility with existing NVRs or software
- Easy Installation with IP Discovery software for Windows or Bonjour for Mac
- Full support for Internet Explorer, partial support for other browsers
- Advanced Intelligent Health Management automated diagnostic notification
- Event Boosting, FTP Image Upload, Open VPN, QoS, IP Filtering
- Event Buffering for showing video prior to motion detection or other event

Other Models in this series

- **HTNC5404M** (same camera in bullet style housing instead of dome)
- **HTNC5803M, HTNC5803DM** (4K / 8MP bullet and dome versions)
- **HTNC5830XIR** (IR PTZ, 30 x zoom, 4K / 8 MP, extended IR 650 ft night vision)
- **HTNC6000D** (12 MP fish eye dome with browser based de-warp)


Software

- Includes free Titanium 256 camera viewing software for PC and Mac (requires Sharx Security NVR for recording)
- Supports Milestone VMS (free for 8 cameras, any resolution, no time limit)
- Supports 16 Camera Blueiris on PCs, 16 camera SecuritySpy on Mac
- Supports Luxriot, Genetec, Aimetis, SightHound, OpenALPR, IPTimeLapse, VLC

Optional Sharx Accessories

- **HWB** downward facing wall bracket, compatible with pole mount **HCPM**
- **HWB4** sconce type downward facing wall bracket, new style narrow mount
- **HPM** chandelier style ceiling pendant mount
- **HCB** indoor / outdoor conduit box, round, compatible with pole mount **HCPM**
- **HCPM** heavy duty pole mount / corner mount, requires **HCB** or **HWB**
- **HTCP2701:** PoE power + networking for up to 1.5 miles range over coax
- **HTNR16560:** 480 fps 16-camera 5 MP NVR (16 PoE), up to 24 TB storage
- **HTNR16621:** 480 fps 16-camera 4K NVR (16 PoE), up to 24 TB storage
- **HTNR32620:** 960 fps 32-camera 4K NVR (16 PoE), up to 48 TB storage
- **HTVM64600:** 1920 fps 64-camera 2/4/8 NVR link, up to 48 TB offsite storage
- **HTVM80600S:** 3840 fps 128-camera 2/4/8 NVR link, up to 96 TB offsite storage

Dimensions

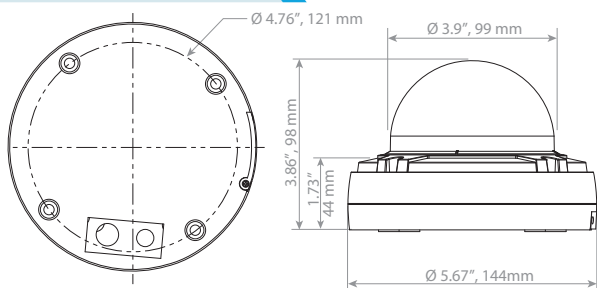

Sharx HTNC5404DM

4 Megapixel Outdoor Day/Night Camera, Motorized 4x Zoom

Key Features

- 4 Megapixel Resolution @ 30 fps, H.264 or H.265
- Motorized Varifocal 2.8 to 12 mm Lens, Motorized 4x optical zoom with smart focus
- True Day & Night
- Wide Dynamic Range (color during the day, black & white with IR at night)
- 28 IR LEDs for up to 25 m / 80 ft Night Vision Coverage in total darkness
- Connectors for Audio In/Out (1/1), Alarm In/Out (1/1)
- Solid metal construction, easy installation
- Mounts directly to wall, eave or ceiling. Optional downward facing wall mounts available
- MicroSDHC or MicroSDXC card up to 256 GB
- PoE, 12VDC (power supply not included, can be powered by Sharx Security NVR)

Technical Specifications

Model	HTNC5404DM (Made in South Korea)	
IMAGE		
Lens	Motorized Varifocal Zoom 2.8~12mm, F1.6, built in P Iris	
Angle of View	97° (wide angle) to 31° (moderate telephoto), horizontal measurement	
Image Sensor	Type	1/3" CMOS Sensor
	Pixels	2688(H)x1520(V)
Min. Illumination	Color : 0.1Lux / BW : 0 Lux@ F1.6 (IR LED On)	
Scanning Mode	Progressive Scan	
Wide Dynamic Range	WDR, 3 levels (low, medium high)	
Day and Night Mode	True Day & Night (Auto, Day, Night)	
Noise Reduction	3DNR	
Digital Zoom	Yes	
Exposure Control	Auto	
White Balance Control	Auto, Incandescent, Fluorescent, Outdoor, Manual	
Metering Mode	Spot, Center, Average, Left, Right, Bottom	
Image Effect	Flip, Mirror, Defog	
Flicker Free Mode	50Hz, 60Hz	
Shutter Speed	Auto(1/20,000 to 1sec), Manual	
IR Illuminator	Quantity	28 IR LEDs, adjustable strength
	Angle	80°(H)
	Distance	Up to 25 m / 80 ft IR night vision in total darkness
Motorized Lens Control	Yes	
VIDEO/AUDIO		
Compression	H.264/H.265 (Baseline, Main, High Profile), MJPEG	
Bitrate Control	CBR, CVBR	
Resolution	2592x1520, 2048x1520, 1920x1080, 1280x1024, 1280x720/960, 1024x768, 704x480/576, 640x480, 320x240	
Frame Rate	Max 30 fps @ all resolutions with WDR off, 25 fps with WDR on	
Streaming	Quad Stream : H.264 / H.265x3, MJPEGx1	
Composite Out	No	
Audio Compression	G.711 (with user supplied external amplified microphone)	
Audio Streaming	2 Way (with user supplied external amplified speaker)	
SYSTEM		
Video Analysis	Intelligent motion detection, intrusion detection, tampering	
Motion Detection Area	16 Programmable Areas (8 Include Areas, 8 Exclude Areas)	
Privacy Zones	8 Privacy Zones	
Email Attachment or FTP Upload	JPEG	
Event Notification	E-mail, FTP, Notification Server, XML Notification, Audio Alert, AIHM	
Audio Alert	User-Defined 3 Audio Files	
Login Authority	Administrator, Operator, Guest	
Event Buffering	FTP	Pre : 30sec, Post : 30sec
	SD Record	Pre : 10sec, Post : 60sec
Manual Trigger	4 Programmable Triggers	
Security	Multi User Authority, IP Filtering, HTTPS, SSL	
Network Time Sync	NTP Server, Synchronized Computer, Manual	
Software Reset	Restart, Reset, Factory Default	
Hardware Factory Reset	Yes	
Auto Recovery	Backup, Restore	
Remote Upgrade	Yes, through web browser, SmartManager or Titanium software	
SD Recording Mode	Event, Continuous	
NETWORK		
Protocol	TCP/IP, UDP, IPv4/v6, HTTP, HTTPS, QoS, FTP, UPnP, RTP, RTSP, RTCP, DHCP, ARP, Zeroconf, Bonjour, OpenVPN	
Client Software	Internet Explorer, Titanium, Milestone, LuxRiot, Blueiris, SecuritySpy, VLC	
Max. User Connection	Live : up to 10 Users, Playback : up to 3 Users	
API Support	Open API, Onvif Compliance	
Mobile Support	Mobilinc, tinyCam, ONVIF compatible apps, free Titanium for use with NVR	
EXTERNAL IN/OUT		
Audio	1 Input, 1 Output(Terminal Block)	
Alarm	1 Input, 1 Output(Terminal Block)	
Ethernet	RJ-45(10/100Base-T)	
u-SD Card	MicroSDHC, MicroSDXC (Max 256GB, class 10 or faster)	
ETC		
Operating Humidity	0 to 100%RH (Weatherproof in rain, snow, ice conditions)	
Operating Temperature	-4 to +120 degrees Fahrenheit (-20 to +50 °C)	
Power Supply	PoE (802.3af compliance), 12VDC	
Power Consumption	200mA (9W)@PoE / 710mA (7.6W) @ 12VDC	
Dimension	5.7" (dia) x 3.9" (Height) / 144 mm (dia) x 98 mm (H)	
Net Weight	Approx. 1.8 lbs (0.8 kg)	
Ingress Protection	IP66	



www.sharxsecurity.com
info@sharxsecurity.com

Copyright © 2019 Sharx Security, Inc. All rights reserved.

Specifications are subject to change without notice.